


Description	: Lithium Battery, CR123A
Chemical System	: Lithium Manganese Dioxide
Nominal Voltage	: 3.0 Volts
Nominal Capacity	: 1500mAh (Discharge at 10mA to 2.0V at 23°C)
Dimensions	: Ø17 mm x 34.5 mm
Terminals	: Flat, Recessed Negative Terminal
Jacket	: PVC Resin Label
Shelf Life	: Up to 10 years
Average Weight	: App. 16g
Application	: Smoke Detector, Sensors, Home Security Products, Medical Equipment
Operating Temperature	: -40°C to 60°C

Model No.: **GPCR123A**




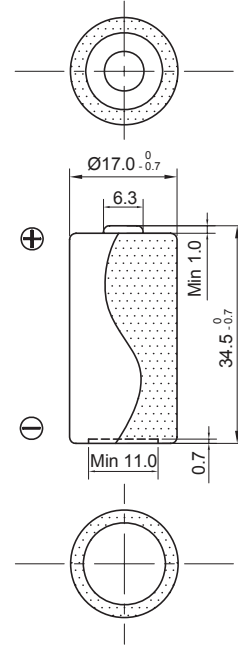


Label Area

Unit : mm

Cross References:

Eveready	Duracell
EL 123AP	DL 123A

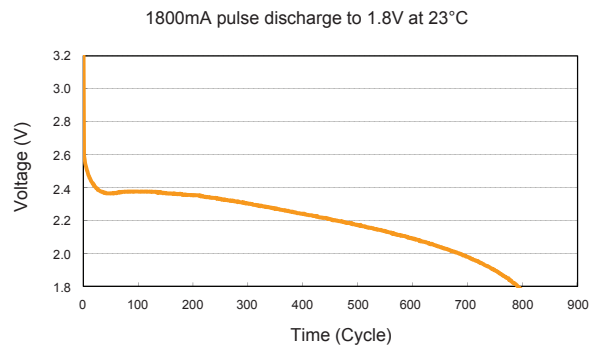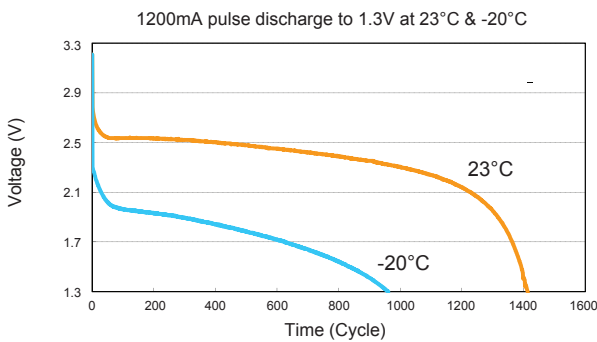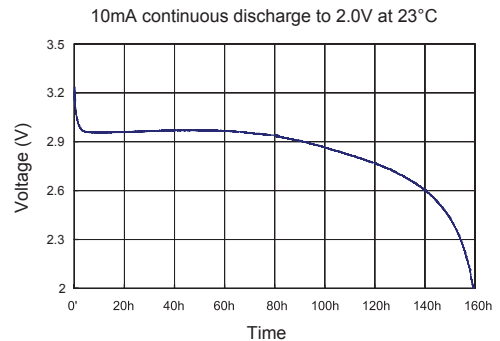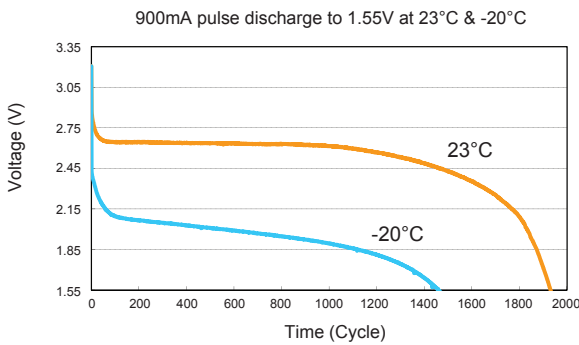

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

www.gpbatteries.com

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.
Copyright © GPI International Ltd. - All rights reserved

Member
Gold Peak Group

09160114102